

CobiCabling CAT 6A Screened Plug



Features:

500MHz working frequency (CAT6A, Class EA)

25-years manufacturers warranty

Connections coding according to TIA 568A and 568B

26-23 AWG, solid or stranded

Fully shielded design


Toolless termination

PRODUCT DESCRIPTION

A reliable solution when field termination of solid copper cable is required, CobiCabling plugs offer quick, tool-free assembly and are an ideal solution for engineers to carry with them to any site. The plugs allow you to connect cables with diameters ranging from 26 to 23AWG (solid or stranded). Just insert wires in cable manager following colour code and snap the housing shut.

CONFORMS TO:

- EN 50173-1:2018-07
- EN 50173-1:2011
- ISO/IEC 11801 Edition 2.2
- ANSI/TIA-568-C.0
- ANSI/TIA-568-C.1
- ANSI/TIA-568-C.2
- IEC 60603-7

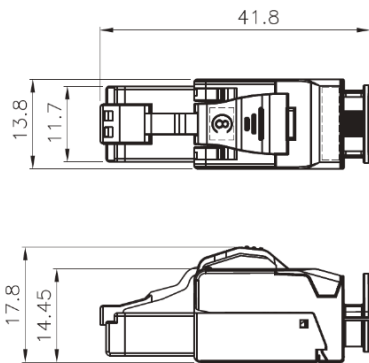

TYPICAL APPLICATIONS:

- 10GBase-T 10 Gigabit Ethernet
- PoE, PoE+, 4PPoE and Power over HDBaseT (POH) applications up to 100 Watts

Technical spec	Details
Dimensions ($\pm 0,2\text{mm}$)	Width: 13,8mm, Height: 17,8mm, Depth: 41,8mm
Type of connector	RJ45
Category	6A (Backward compatibility)
Types of shielding	STP (Screened)
Housing	Die cast Zinc-alloy
Conductor diameter	26-23 AWG

Part numbers	Name
C27-1000	CobiCabling CAT 6A Screened Plug