


CobiCabling CAT 5e Unshielded Patch Lead

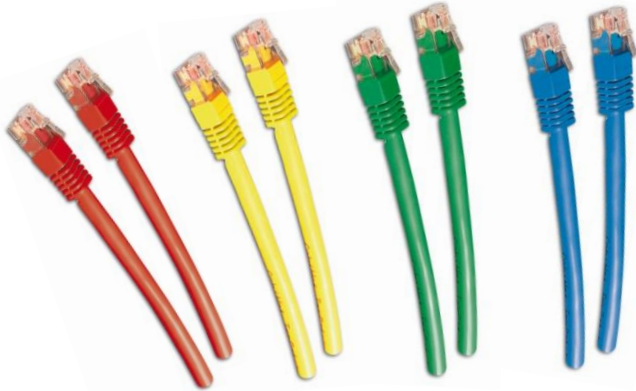

Features:

100MHz working frequency (CAT5e, Class D)

25-years manufacturers warranty

Choice of colours

Gigabit Ethernet performance

PRODUCT DESCRIPTION

CobiCabling Patch Leads are designed to ensure best channel performance. Combined with our patch panels and connectivity product it forms a truly reliable foundation for any network.

CONFORMS TO:

- EN 50173-1:2018-07
- EN 50173-1:2011
- ISO/IEC 11801 Edition 2.2
- ANSI/TIA-568-C.0
- ANSI/TIA-568-C.1
- ANSI/TIA-568-C.2

Technical spec	Details
Frequency	Up to 100 MHz
Performance	1 Gb/s
Warranty	25-years manufacturers warranty
Outer sheath	Different colours, PVC
Category	5e

Part numbers	Name
C14-5000-xx	CobiCabling CAT 5e Unshielded Patch Lead, grey 0,25m/0,5m/1m/1,5m/2m/3m/5m/7,5m/10m/15m/20m/25m/30m
C14-5010-xx	CobiCabling CAT 5e Unshielded Patch Lead, yellow 0,25m/0,5m/1m/1,5m/2m/3m/5m/7,5m/10m/15m/20m/25m/30m
C14-5020-xx	CobiCabling CAT 5e Unshielded Patch Lead, green 0,25m/0,5m/1m/1,5m/2m/3m/5m/7,5m/10m/15m/20m/25m/30m
C14-5030-xx	CobiCabling CAT 5e Unshielded Patch Lead, blue 0,25m/0,5m/1m/1,5m/2m/3m/5m/7,5m/10m/15m/20m/25m/30m
C14-5040-xx	CobiCabling CAT 5e Unshielded Patch Lead, red 0,25m/0,5m/1m/1,5m/2m/3m/5m/7,5m/10m/15m/20m/25m/30m
C14-5050-xx	CobiCabling CAT 5e Unshielded Patch Lead, black 0,25m/0,5m/1m/1,5m/2m/3m/5m/7,5m/10m/15m/20m/25m/30m

xx – length in meters