

CobiCabling CAT 6 IDC LSA Patch Panel



Features:

250MHz working frequency (CAT6, Class E)

25-years manufacturers warranty

LSA type connections

Connections coding according to TIA 568A and 568B

Unshielded


Black colour

PRODUCT DESCRIPTION

Our CAT6 punch down patch panels offer a reliable solution with easily identifiable module colour coding, basic cable management, 1 to 24 number coded front facias. The labelling strip is covered by a plexiglass to provide a good visibility and protection. All panels will be delivered with mounting kits, cable ties.

CONFORMS TO:

- EN 50173-1:2013
- ISO/IEC 11801 Edition 2.2
- ANSI/TIA-568-C.0/C.1/C.2

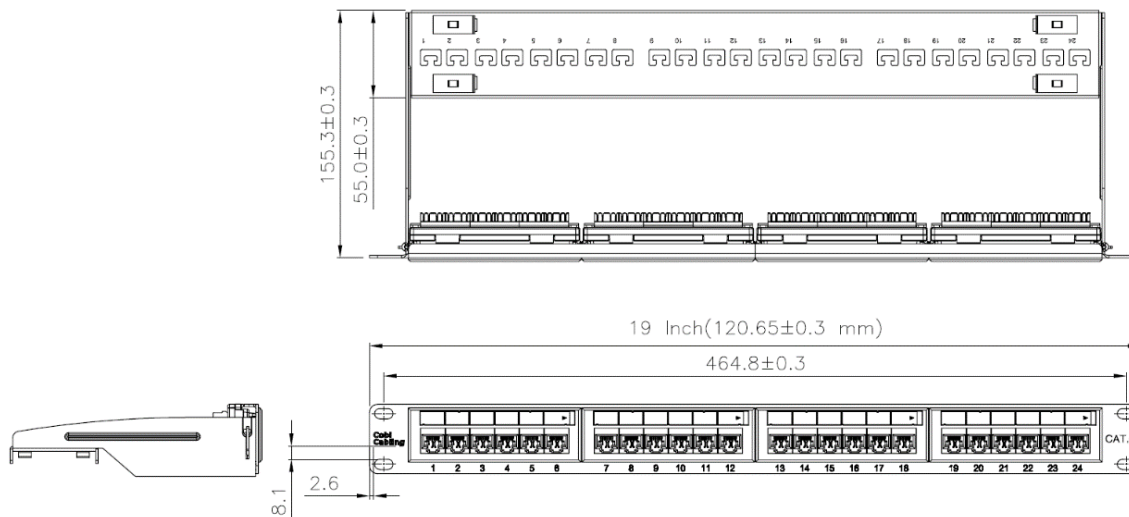

Technical spec	Details
Dimensions	Width: 19", Height: 1U, Depth with rear cable management: 155,3mm
Number of ports	24
Category	6
Types of shielding	UTP (unscreened)
Conductor diameter	AWG 26-22
Colour	RAL9005 (Black)
Part numbers	Name
C12-6100	CobiCabling CAT 6 24 port 1U 19" UTP Patch Panel